

CLARKE INSTRUMENTS LTD

At the heart of innovative security solutions for the control of access since 1969

Electric Releases

Type 984


Suitable for high security environments including prisons, custody suites and detention centres using Chubb 3G112 deadlock or similar. Also suitable for door interlocking via the micro switch.

Specification

- ◆ 12VDC 25% fail locked
- ◆ Current consumption 1.2A
- ◆ Precision machined from solid brass
- ◆ 4.8mm thick stainless steel faceplate zinc black passivate
- ◆ Locking plunger - 8mm diameter stainless steel
- ◆ Withstands up to 19KN
- ◆ Suits deadbolt dimensions Height 65mm, Width 18mm, Throw 18-21mm (depending on door gap)

Optional Extras

- ◆ 24VDC
- ◆ Fail open on power failure
- ◆ Micro switch sensing for bolt status
- ◆ Micro switch sensing for solenoid status

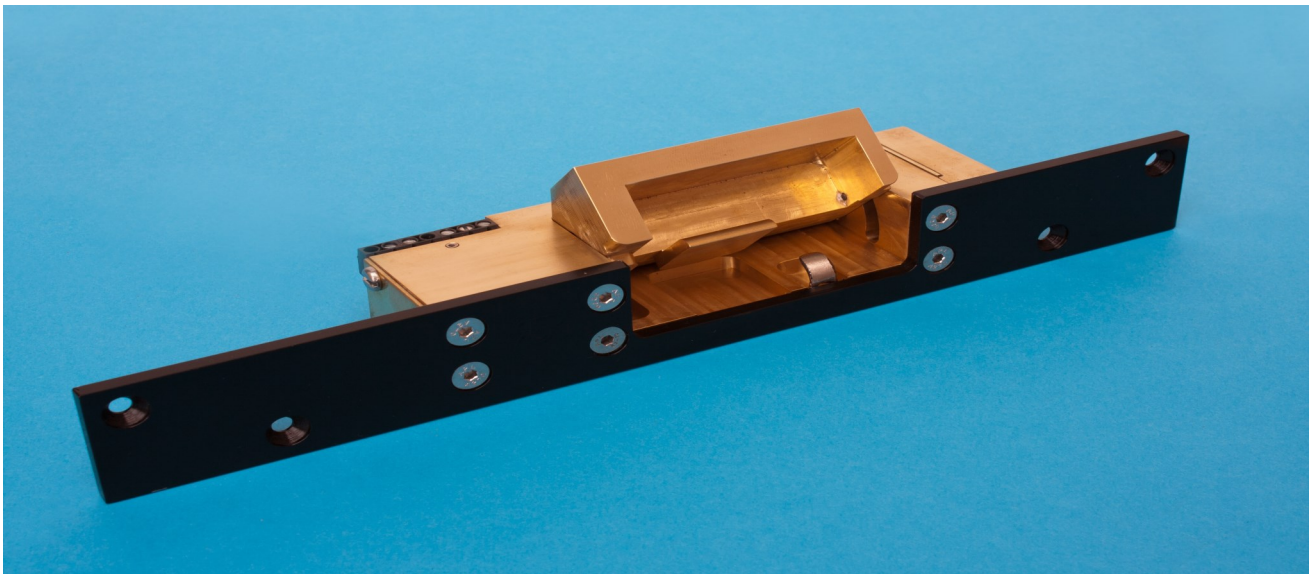

Designed and manufactured in the UK by Clarke Instruments Ltd

LOCKSONLINE.CO.UK

The Old Customs House
The Docks, Milford Haven, SA73 3AA



Web: www.locksonline.co.uk

Email: enquiries@locksonline.co.uk

C.I.L. Products comply with
EMC Directives of EEC
Certificate Number FM 12702
BS EN ISO9001:2008

