

ZT-CP2/B Gas Abort Call point




The ZT-CP2/B is the latest Gas Abort call point from Zeta Alarm Systems. It has a modern design, and has been built to EN54 part 11.

It can be used with most extinguishing control panels. It is used to stop the release of the extinguishing gas, for example if the room is occupied.

It is a resettable call point that signals its operation with a yellow flag entering the window area.

It has a protective Perspex cover as well as a “SNAPLATCH” catch that needs to be broken off before the call point cover can be lifted. This acts as a deterrent to malicious activations, and allows double action activation

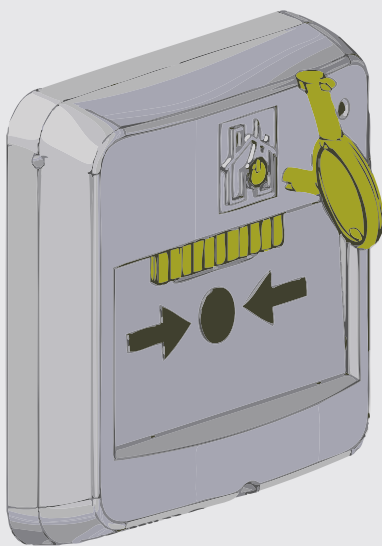

Insert Key into Reset Barrel

Turn Key Clockwise.

The Flag retracts and Operating Element springs forward.

Unit is now reset

SPECIFICATIONS

MODEL	ZT-CP2/B
PART NO	43-312
INPUT VOLTAGE	9 -33V DC
ELEMENT TYPE	RESETTABLE
QUIESCENT CURRENT	0 mA
ALARM CURRENT	DEPENDS ON CONTROL PANEL
ALARM LOAD	NORMALLY OPEN CONTACT, CLOSES ON ACTIVATION
ALARM ACTIVATION	BREAK SNAPLATCH, LIFT PERSPEX, PRESS ELEMENT
COLOUR	BLUE
OPERATION FLAG COLOUR	YELLOW
OPERATING TEMP.	-20° C to 50° C
MAX. HUMIDITY	95% RH N/C
IP RATING	IP 43
SIZE (WxHxD mm)	111 X 100 X 67
WEIGHT	198 g